

Cable Guide

SimRush Omni

The SimRush Omni is an indoor & outdoor controller / router for your network. This model is an all-in-one unit combining the Indoor and Outdoor units.

It is pre-configured out of the box and managed through the SimRush web portal SPanel. To get online, simply plug in power to your SimRush Go as instructed below.


Quickstart

Make sure you follow the following steps to get online.

1. Connect the power cable to the unit.
 - a. Option 1 - Using the provided 24v 1.2a power pack, plug this into the round power socket




- a. Option 2 - Using the provided Power over Ethernet (PoE) injector connect this into the Ethernet socket far left port

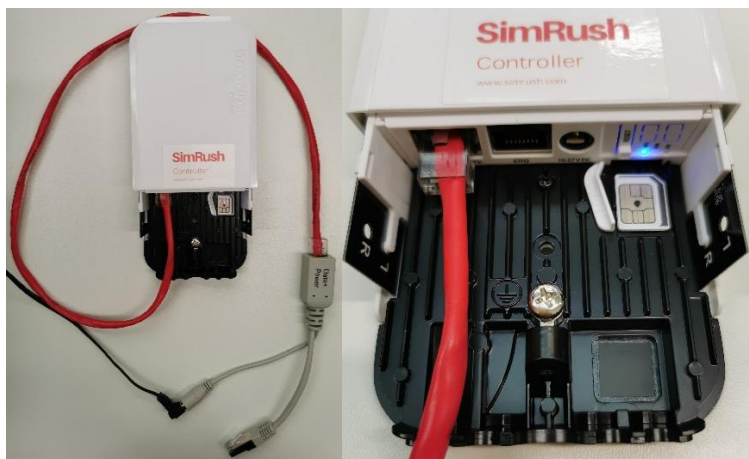

2. Connect your PC to the LAN
 - a. Ethernet port 1 or 2
 - b. Wireless - Default wireless is "SimRush-xxxxxx" and the Serial number as the password, e.g AABBC112233
- Serial number is located on the box or back of the controller, and is all characters before the "/123"

3. Ensure the SIM (if not pre-installed) is inserted correctly
 - a. The SimRush Omni uses a "Micro" SIM size.
 - b. It is inserted to the Right side of the unit, Metal SIM side UP and with the cutout corner toward the Right side of the unit

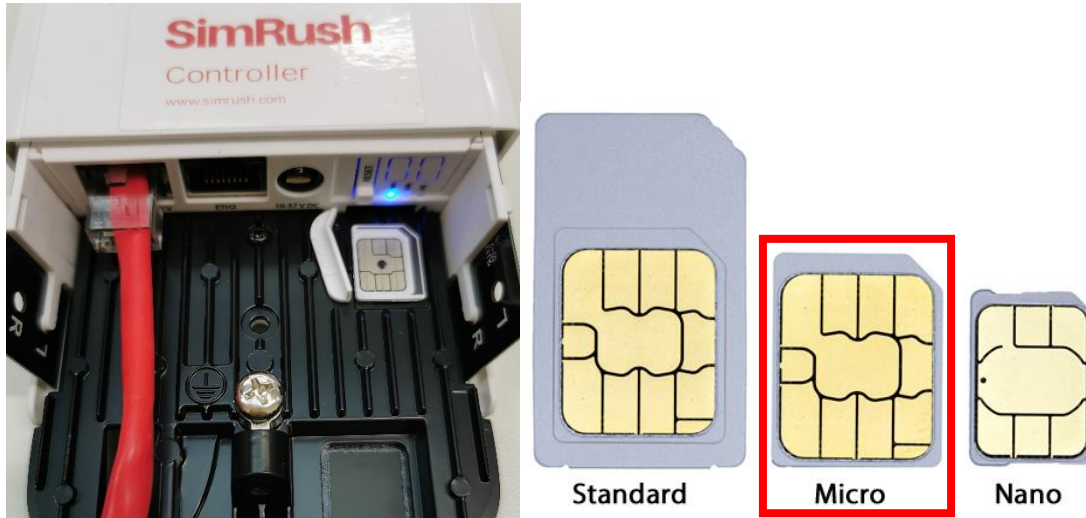

4. To make changes to the LAN address or Wireless settings, please visit SPANEL: <https://portal.simrush.com/>



Use the following steps to access the SimRush Go unit to make changes to APN settings or check SIM/Carrier status information:

1. Ensure you are connected to the SimRush Controller via Ethernet or WiFi.
2. Using a browser, browse to <http://192.168.10.1/>
 - a. Login details are, Username: **installer**, Password: **blank** (There is no password set)
3. Once you have logged in, the main status page will show you the current carrier/APN information along with signal information
 - a. To Change the APN:
 - i. At the top left corner, click "Interfaces", the page will refresh
 - ii. You will need to then click on "lte1" under the name column, the page will refresh again
 - iii. Under the "General" section, click on the dropdown on the line for "APN Profile" - by default this will be set to EE, click the down arrow "v" which will list other carriers which are pre-generated in the list
 - iv. Select the desired carrier, then click apply/OK at the top of the page
4. Further information about the Outdoor unit settings can be found on the SimRush FAQ's section of the SimRush website: <https://www.simrush.com/about-simrush/faqs/>

