


## Cable Guide


### SimRush One & SimRush One+

The SimRush One & SimRush One+ are indoor wireless controller / routers for your network. It is pre-configured out of the box and managed through the SimRush web portal SPanel. To get online, simply plug in your SimRush Outdoor unit (ODU) as instructed below.

#### Indoor Unit (Controller)

Make sure you follow the following steps to get online.

1. Connect the ethernet cable to Ethernet Port 5 ( Highlighted in GREEN )
2. Connect the Controller to the power adaptor supplied (24v 1.2a DC)
3. Connect your PC to the LAN ( Highlighted in ORANGE )
  - a. Ethernet port 2, 3 or 4 ( or SFP fibre port on One+ )
  - b. Wireless – Default wireless is "SimRush-xxxxx" and the Serial number as the password, e.g AABBC112233  
– Serial number is located on the box or back of the controller, all characters before the "/123"
4. To make changes to the LAN address or Wireless settings, please visit SPanel: <https://portal.simrush.com/> 
5. (OPTIONAL) Connect your alternative broadband to utilise the built-in Load-Balancing feature, connect Ethernet Port1 ( Highlighted in RED ) to your alternative broadband network. Please ensure your alternative broadband router is providing the following network via DHCP: Gateway: 192.168.1.1 , Subnet: 255.255.255.0

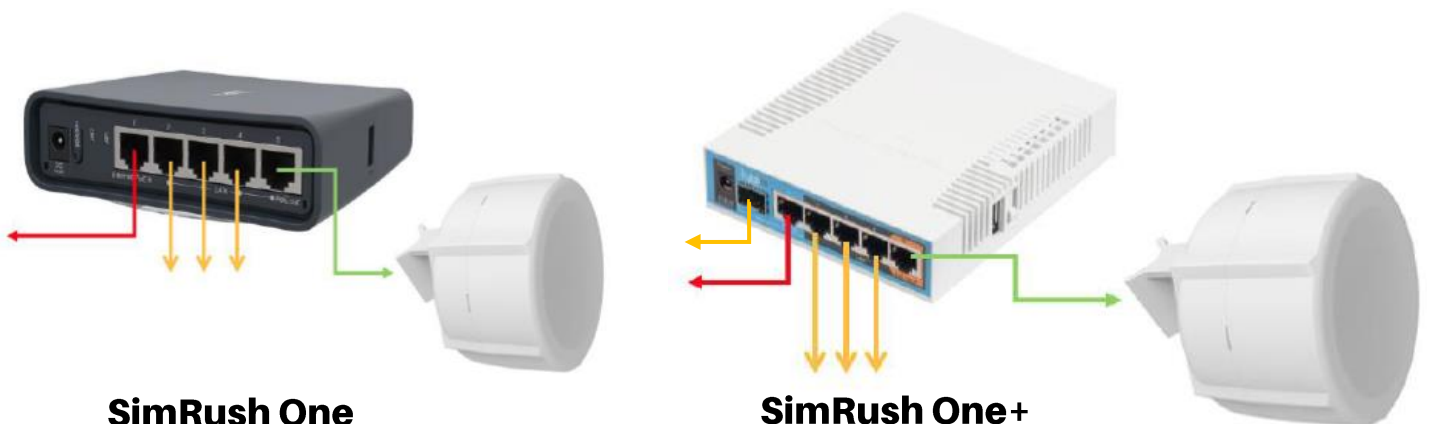

#### SimRush One

Ether1 – **AUX1** Port  
Ether2 – **LAN** Port  
Ether3 – **LAN** Port  
Ether4 – **LAN** Port  
Ether5 – **ODU1** Port

#### SimRush One+

SFP – **LAN** Port  
Ether1 – **AUX1** Port  
Ether2 – **LAN** Port  
Ether3 – **LAN** Port  
Ether4 – **LAN** Port  
Ether5 – **ODU1** Port

#### Outdoor Unit (ODU)

Please see ODU Guide